



Pitch:5.08/7.62mm

MODEL:JL129R

认证/CERTIFICATION



材质及电镀

| | |
|----|---------------|
| 螺丝 | M3.0, 钢, 镀锌 |
| 方块 | 黄铜, 镀镍 |
| 焊脚 | 黄铜, 镀锡 |
| 塑件 | PA66, UL94V-0 |

电气性能

| | | |
|------|--------------|--------------------|
| 参考标准 | UL | IEC |
| 额定电压 | 300V | 250V |
| 额定电流 | 20A | 20A |
| 使用线径 | 26-12AWG | 2.5mm ² |
| 接触电阻 | 20mΩ | |
| 绝缘电阻 | 500MΩ/DC500V | |
| 耐电压 | AC2000V/1Min | |

机械性能

| | |
|------|---------------------------|
| 温度范围 | -40°C~+105°C |
| 瞬时温度 | +250°C 5秒 |
| 扭矩 | 5.10kgf-cm/0.5Nm/4.43Lbin |
| 剥线长度 | 6-7mm |

MATERIAL


| | |
|------------|----------------------|
| Screws | M3.0 Steel Zn plated |
| Cage | Brass, Ni plated |
| Pin header | Brass, Sn plated |
| Housing | PA66, UL94V-0 |

ELECTRICAL

| | | |
|-----------------------|--------------|--------------------|
| Standard | UL | IEC |
| Rated voltage | 300V | 250V |
| Rated current | 20A | 20A |
| Wire range | 26-12AWG | 2.5mm ² |
| Contact resistance | 20mΩ | |
| Insulation resistance | 500MΩ/DC500V | |
| Withstanding voltage | AC2000V/1Min | |

MECHANICAL

| | |
|----------------|---------------------------|
| Temp. range | -40°C~+105°C |
| Max. soldering | +250°C 5 Sec |
| Torque | 5.10kgf-cm/0.5Nm/4.43Lbin |
| Strip length | 6-7mm |

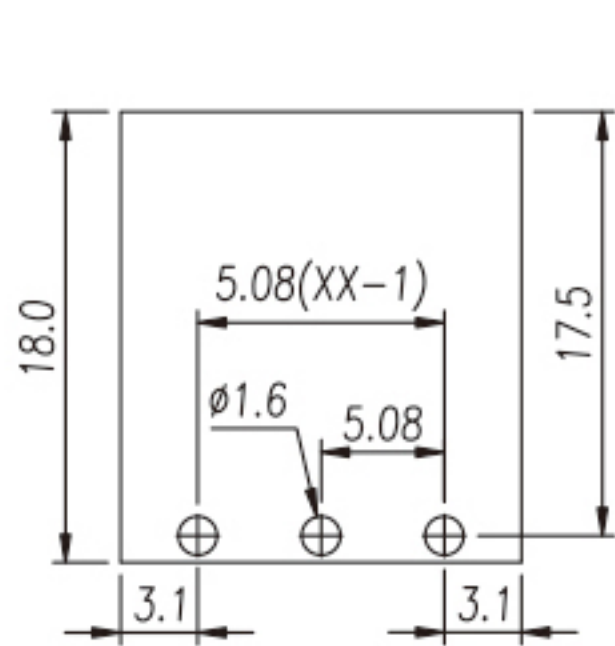

P.C.B. LAYOUT

