


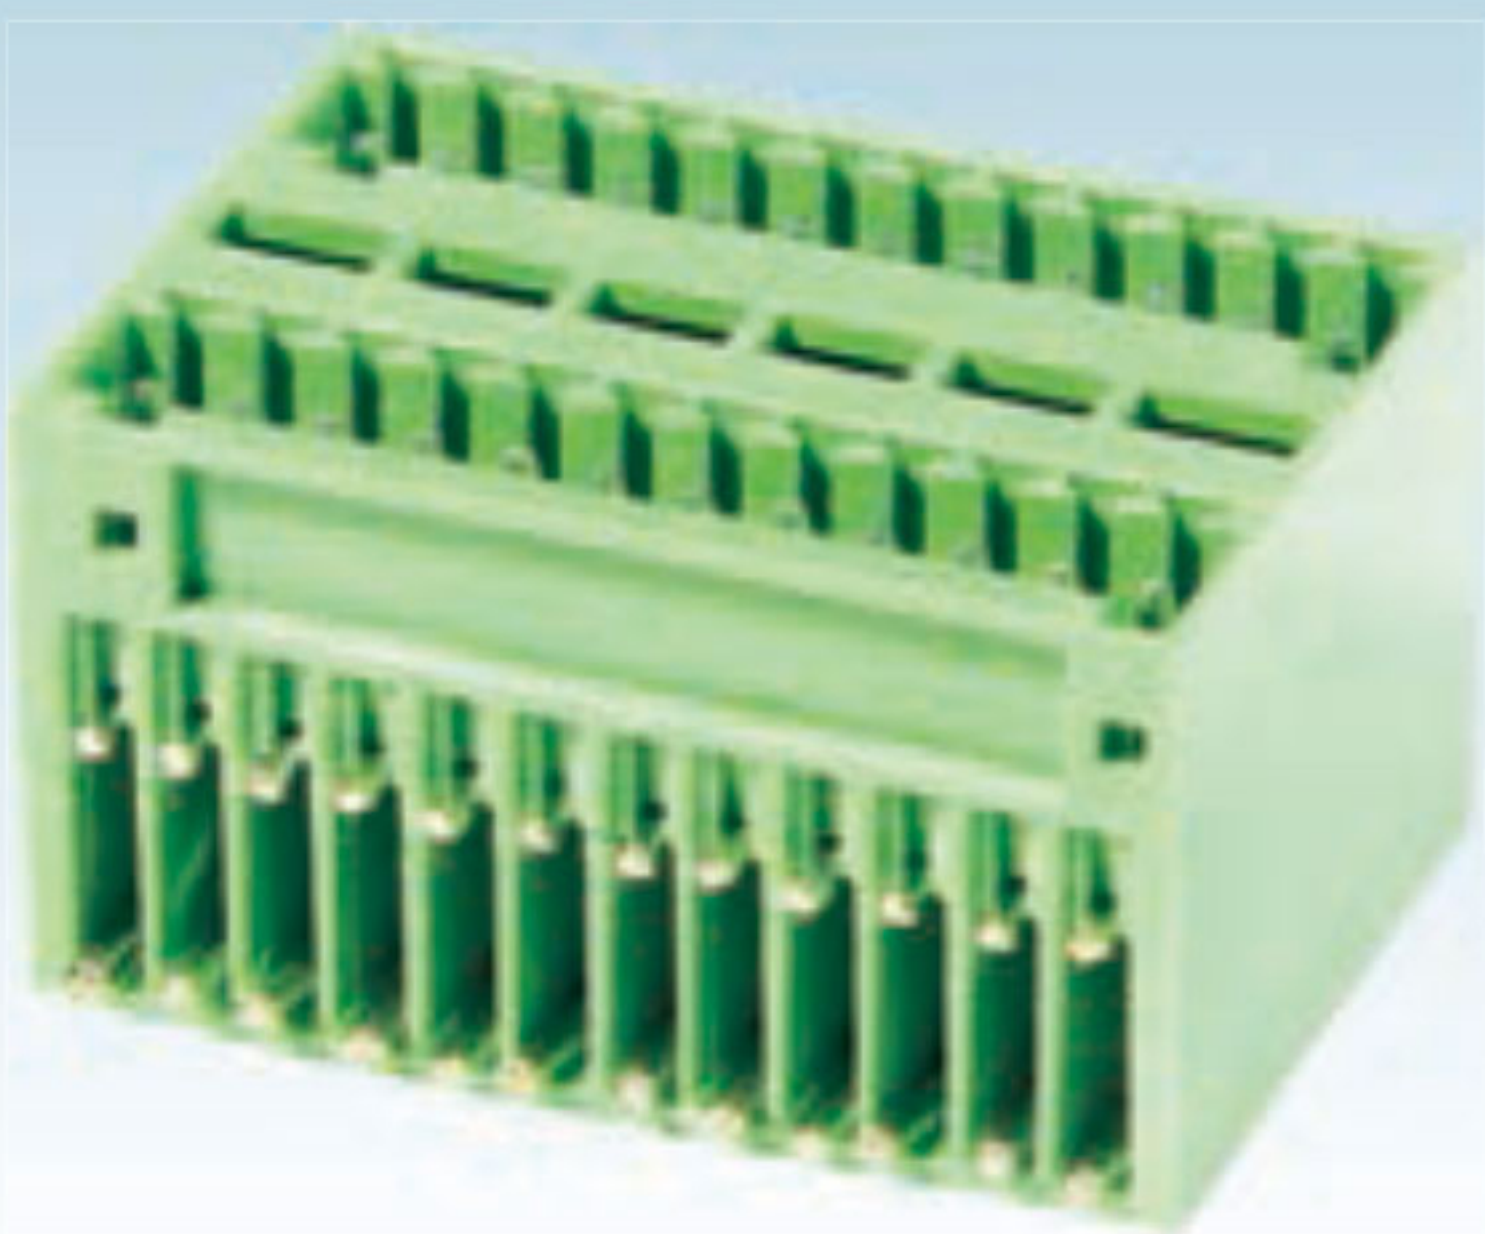

Pitch:2.5mm

MODEL:JL15EDGVH-2.5

认证/CERTIFICATION	
------------------	--

材质及电镀	
焊针	黄铜, 镀锡
塑件	PA66, UL94V-0

电气性能		
参考标准	UL	IEC
额定电压	150V	130V
额定电流	5A	6A
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC1500V/1Min	

机械性能	
温度范围	-40℃~+105℃
瞬时温度	+250℃ 5秒

MATERIAL	
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	150V	130V
Rated current	5A	6A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC1500V/1Min	

MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

