

Pitch:5.0/5.08mm

## MODEL:JL2EDGB

### 认证/CERTIFICATION

### 材质及电镀

焊针  
塑件

磷青铜, 镀锡  
PA66, UL94V-0

### 电气性能

参考标准  
额定电压  
额定电流  
接触电阻  
绝缘电阻  
耐电压

UL	IEC
300V	450V
15A	20A
20mΩ	
500MΩ/DC500V	
AC2000V/1Min	

### 机械性能

温度范围  
瞬时温度

-40°C~+105°C  
+250°C 5秒

### MATERIAL

Pin header  
Housing

Phosphor bronze, Si plated  
PA66, UL94V-0

### ELECTRICAL


Standard  
Rated voltage  
Rated current  
Contact resistance  
Insulation resistance  
Withstanding voltage

UL	IEC
300V	450V
15A	20A
20mΩ	
500MΩ/DC500V	
AC2000V/1Min	

### MECHANICAL

Temp. range  
Max. soldering

-40°C~+105°C  
+250°C for 5 Sec

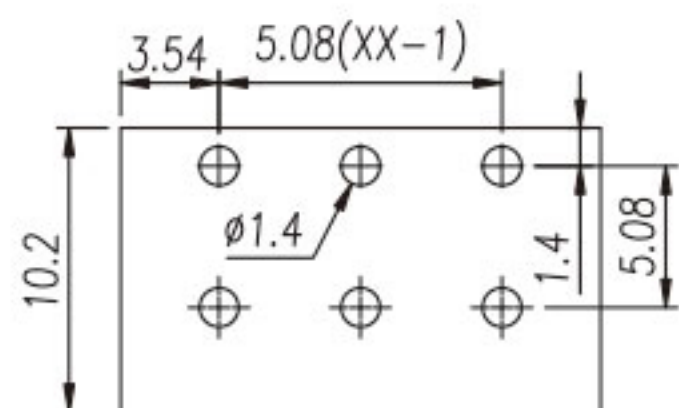

P.C.B. LAYOUT

