

Pitch:2.54mm

MODEL:JL141R

认证/CERTIFICATION



材质及电镀

弹片 不锈钢
 焊针 黄铜, 镀锡
 塑件 PA66, UL94V-0

电气性能

参考标准	UL	IEC
额定电压	150V	130V
额定电流	2A	6A
使用线径	26-18AWG	1.0mm ²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC1300V/1Min	

机械性能

温度范围 -40°C~+105°C
 瞬时温度 +250°C 5秒
 剥线长度 9-10mm

MATERIAL


Wire guard Stainless steel
 Pin header Brass, Sn plated
 Housing PA66, UL94V-0

ELECTRICAL


Standard	UL	IEC
Rated voltage	150V	130V
Rated current	2A	6A
Wire range	26-18AWG	1.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC1300V/1Min	

MECHANICAL

Temp. range -40°C~+105°C
 Max. soldering +250°C 5 Sec
 Strip length 9-10mm

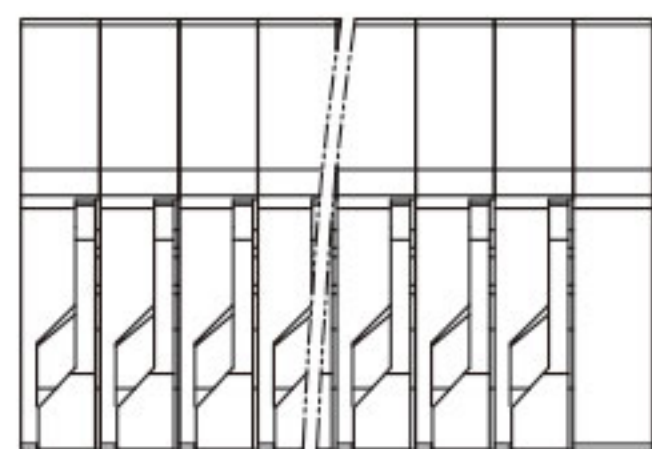

2.54(XX+1)

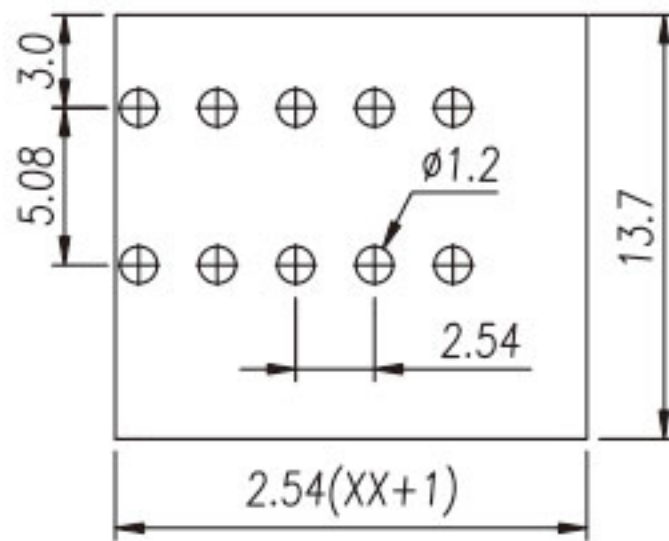

P.C.B. LAYOUT

