

Pitch:2.54mm

## MODEL:JL211R-2.54

### 认证/CERTIFICATION

### 材质及电镀

弹片	不锈钢
焊针	黄铜, 镀锡
塑件	PA66, UL94V-0

### 电气性能

参考标准	UL	IEC
额定电压	150V	130V
额定电流	5A	6A
使用线径	26-18AWG	1.0mm <sup>2</sup>
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC1300V/1Min	

### 机械性能

温度范围	-40°C~+105°C
瞬时温度	+250°C 5秒
剥线长度	9-10mm

### MATERIAL


Wire guard	Stainless steel
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0

### ELECTRICAL

Standard	UL	IEC
Rated voltage	150V	130V
Rated current	5A	6A
Wire range	26-18AWG	1.0mm <sup>2</sup>
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC1300V/1Min	

### MECHANICAL

Temp. range	-40°C~+105°C
Max. soldering	+250°C 5 Sec
Strip length	9-10mm

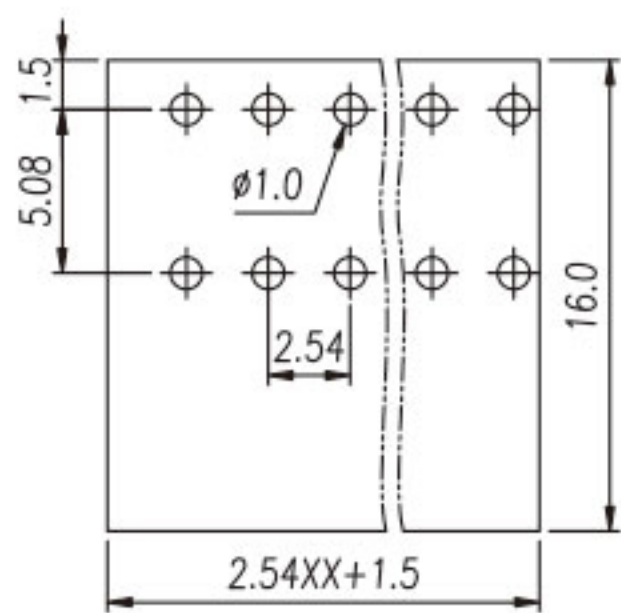

P.C.B. LAYOUT

