



Pitch:3.81/5.0/7.5/10.0mm

MODEL:JL235A

认证/CERTIFICATION

材质及电镀

簧片	不锈钢
焊针	黄铜, 镀锡
塑件	PA66, UL94V-0

电气性能

参考标准	UL	IEC
额定电压	300V	250V
额定电流	5A	15A
使用线径	22-18AWG	1.0mm ²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	

机械性能

温度范围	-40°C~+105°C
瞬时温度	+250°C 5秒
剥线长度	9-10mm

MATERIAL



Wire guard	Stainless steel
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	5A	15A
Wire range	22-18AWG	1.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	

MECHANICAL

Temp. range	-40°C~+105°C
Max. soldering	+250°C 5 Sec
Strip length	9-10mm

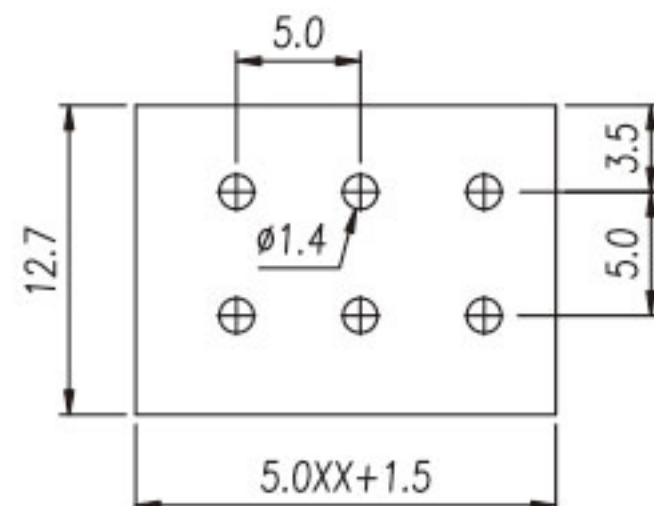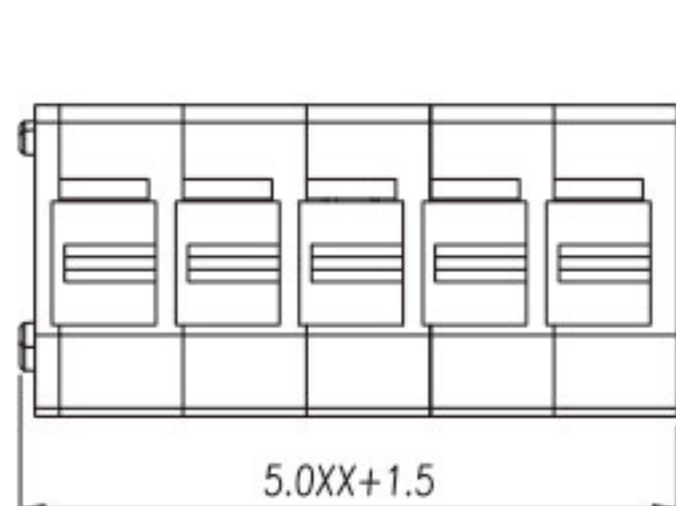

P.C.B. LAYOUT

