


认证/CERTIFICATION



Base: Flat-bottom
Screws: Steel, Zn plated
Clamp: Cladded copper strips, Zn plated
Housing material: PA66, UL94V-2
Temp. range: -40°C~+105°C
Poles available: 2-12P

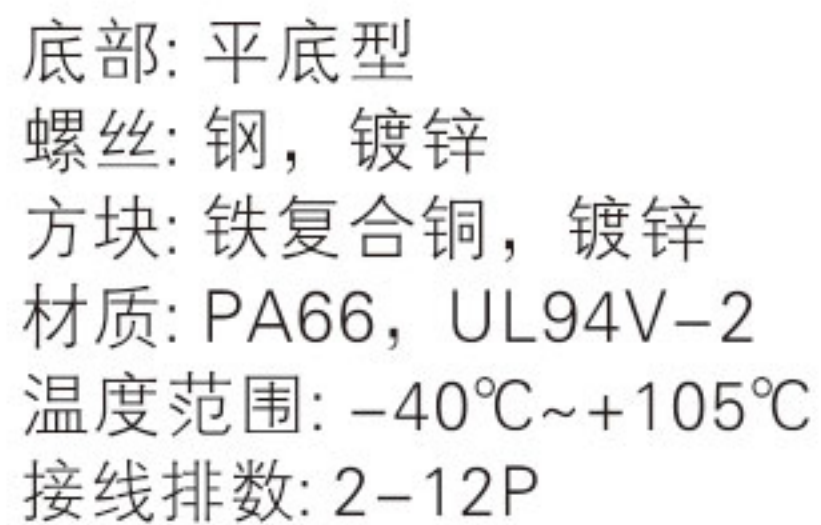