MODEL: MY__HS+1.2

认证/CERTIFICATION	
	c UL us, VDE, CQC

底部: H型底部加高1.2mm	Base: With 1.2mm elevated base
螺丝: 钢，镀锌	Screws: Steel, Zn plated
方块: 铁复合铜，镀锌	Clamp: Cladded copper strips, Zn plated
材质: PA66，UL94V-2	Housing material: PA66, UL94V-2
温度范围: -40℃~+105℃	Temp. range: -40℃~+105℃
接线排数: 2-12P	Poles available: 2-12P

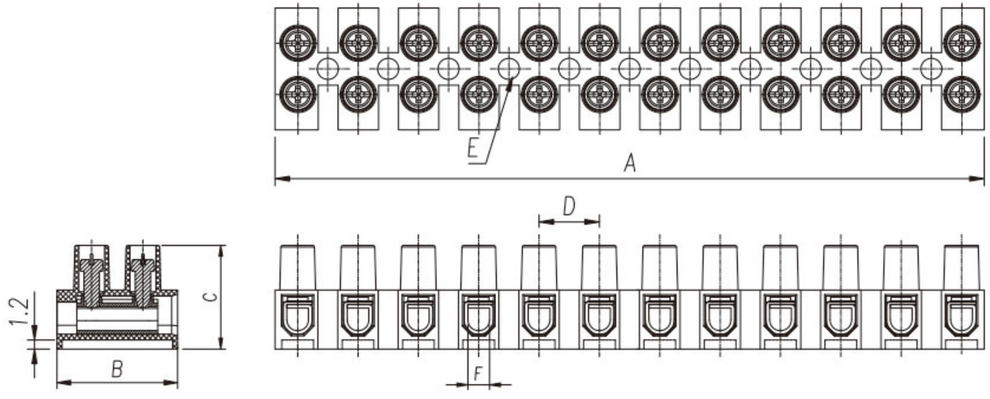

型号 Model	线径 mm^2	UL		ICE		螺丝 Screw	尺寸 Dimensions(mm/in)						
		电压	电流	电压	电流		Unit	A	B	C	D	E	F
MY8HS+1.2	0.5-4.0	300V	20A	450V	24A	M2.6x5	mm	96.0	17.80	15.50	8.20	3.00	3.0x3.4
MY10HS+1.2	1.0-6.0	300V	26A	750V	24A	M3.0x6	mm	116.7	20.00	16.90	10.00	3.50	3.6x3.7