

MODEL: MY__HW+4.3


带弹片 Wire Protector

认证/CERTIFICATION



底部: H型底部加高4.3mm
 螺丝: 钢, 镀锌
 方块: 黄铜, 镀镍
 弹片: 磷青铜, 镀镍
 材质: PA66, UL94V-2
 温度范围: -40°C~+105°C
 接线排数: 2-12P

Base: With 4.3mm elevated base
 Screws: Steel Ni plated
 Clamp: Brass, Ni plated
 Shrapnel: Phosphor bronze, Ni plated
 Housing material: PA66, UL94V-2
 Temp. range: -40°C~+105°C
 Poles available: 2-12P

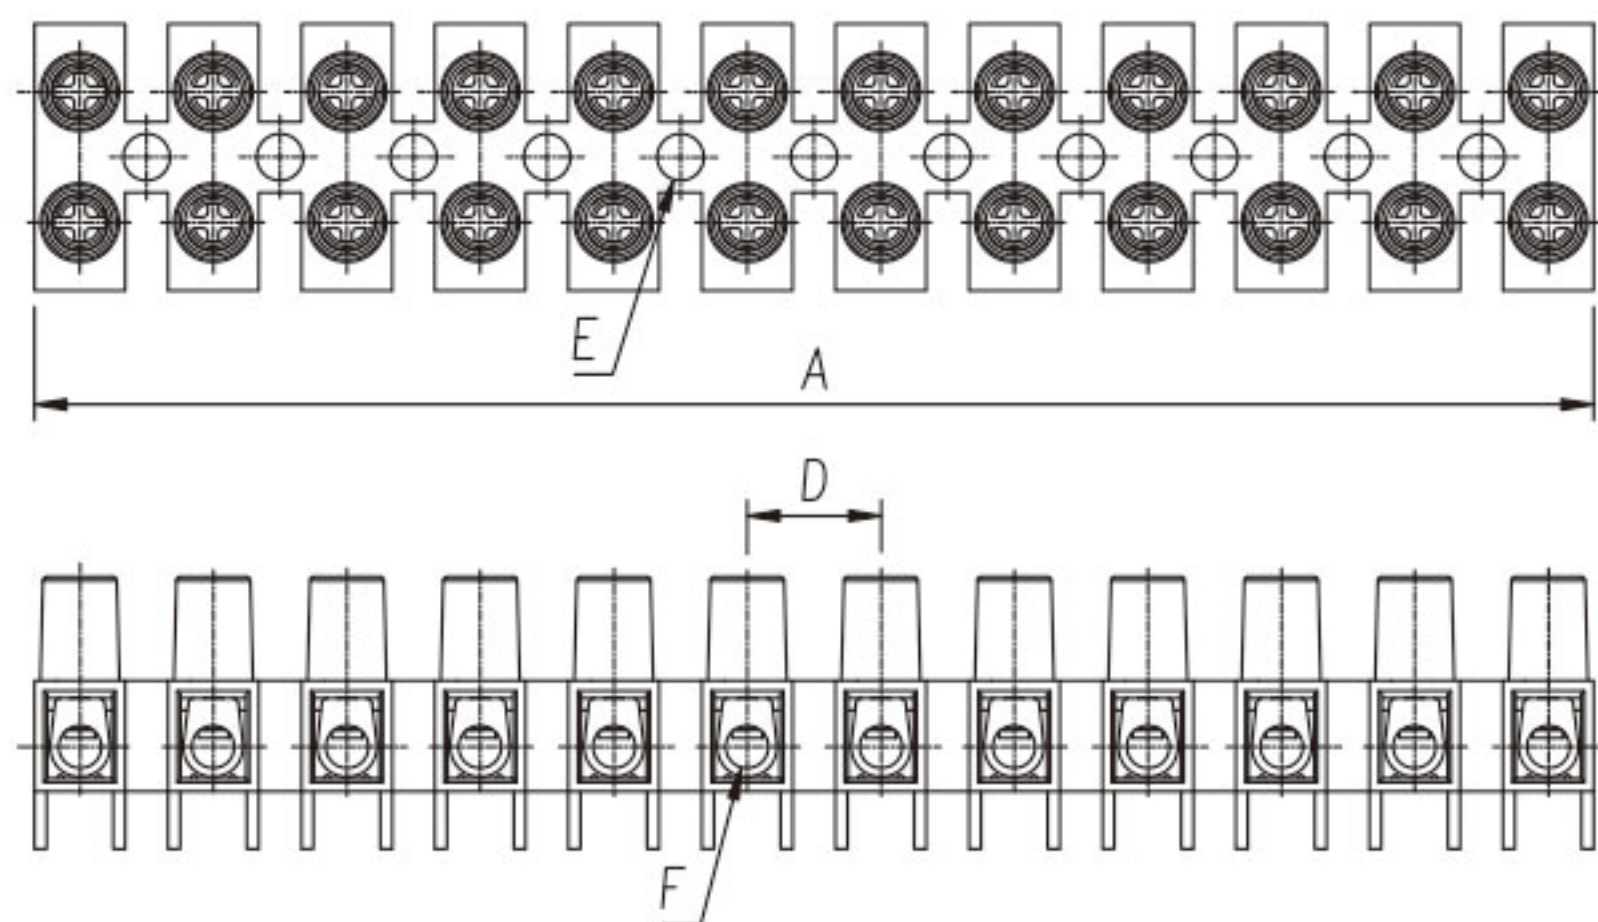

型号 Model	线径 mm ²	UL		ICE		螺丝 Screw	尺寸 Dimensions(mm/in)						
		电压	电流	电压	电流		Unit	A	B	C	D	E	F
MY8HW+4.3	1.5	300V	17.5A	450V	24A	M2.6x5	mm	94.0	17.0	17.30	8.00	3.00	2.80
MY10HW+4.3	2.5	300V	28A	750V	24A	M3.0x6	mm	116.7	20.3	20.30	10.00	3.50	3.20
MY12HW+4.3	6.0	600V	41A	750V	45A	M3.5x7	mm	139.7	24.0	22.10	12.00	3.90	3.90
MY16HW+4.3	10.0	600V	57A	750V	60A	M4.0x9	mm	171.3	32.0	28.10	14.60	4.40	4.80