

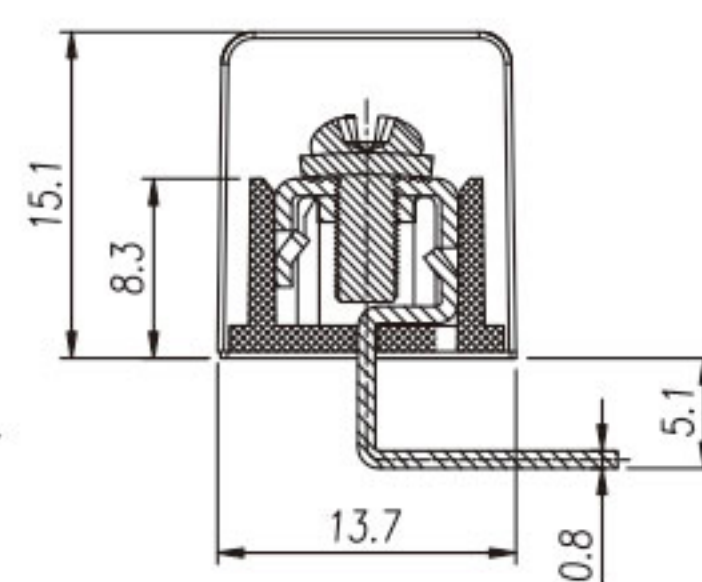


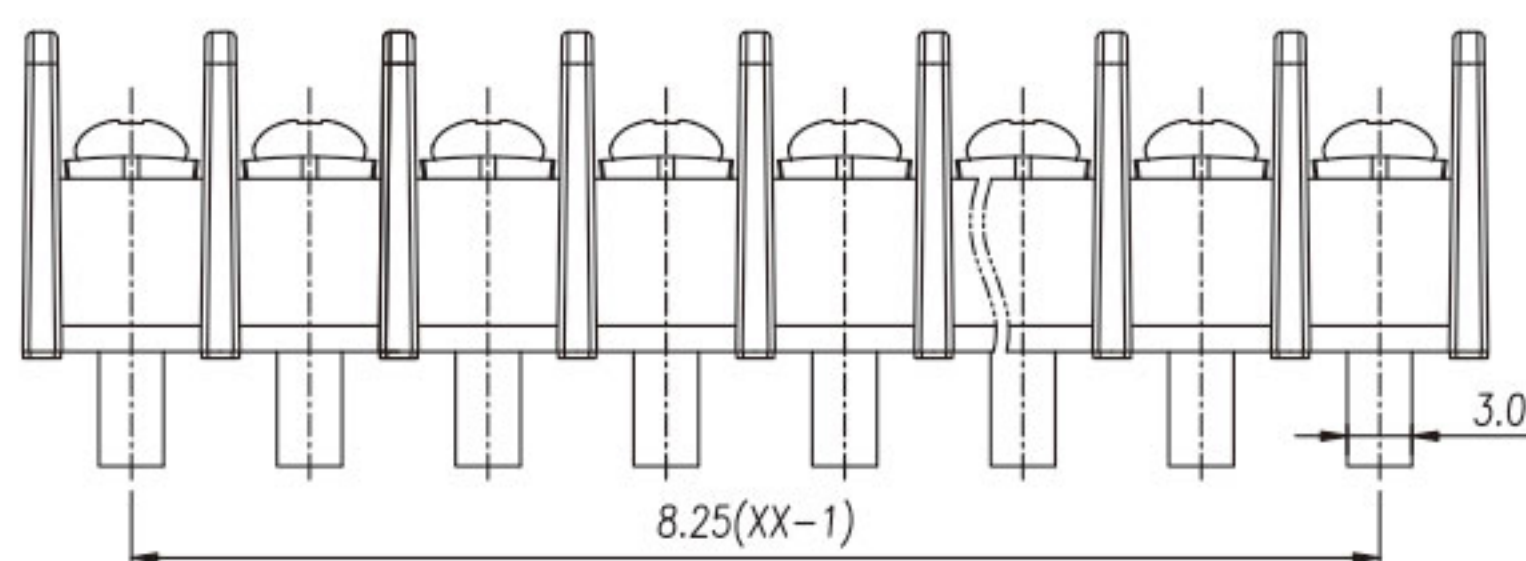

**MODEL:JL35R**

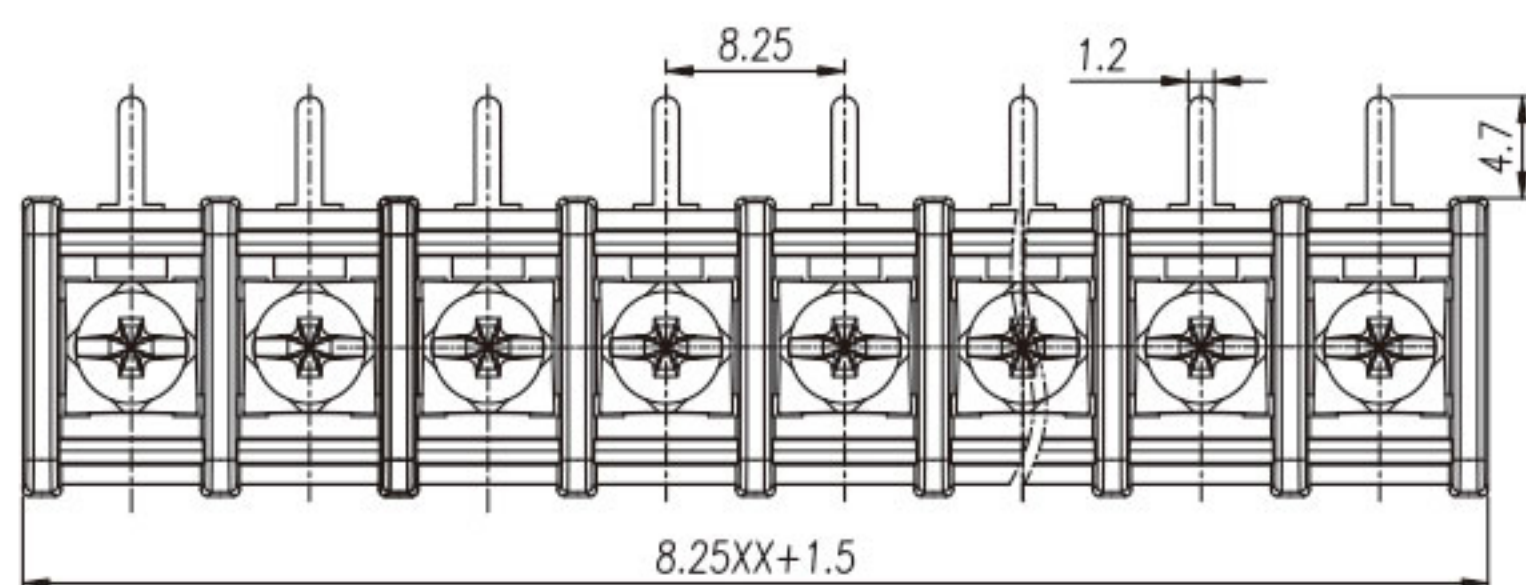

#### MATERIAL

|            |                      |
|------------|----------------------|
| Screws     | M3.0 Steel Ni plated |
| Pin Header | Brass, Sn plated     |
| Housing    | PA66, UL94V-0        |

#### ELECTRICAL

|                       |                           |                    |
|-----------------------|---------------------------|--------------------|
| Standard              | UL                        | IEC                |
| Rated voltage         | 300V                      | 250V               |
| Rated current         | 15A                       | 24A                |
| Wire range            | 22-14AWG                  | 2.5mm <sup>2</sup> |
| Contact Resistance    | 20mΩ                      |                    |
| Insulation resistance | 500MΩ/DC500V              |                    |
| Withstanding voltage  | AC2000V/1Min              |                    |
| Temp. range           | -40°C~+105°C              |                    |
| Torque                | 5.10kgf-cm/0.5Nm/4.43Lbin |                    |