


**MODEL:JL38H**

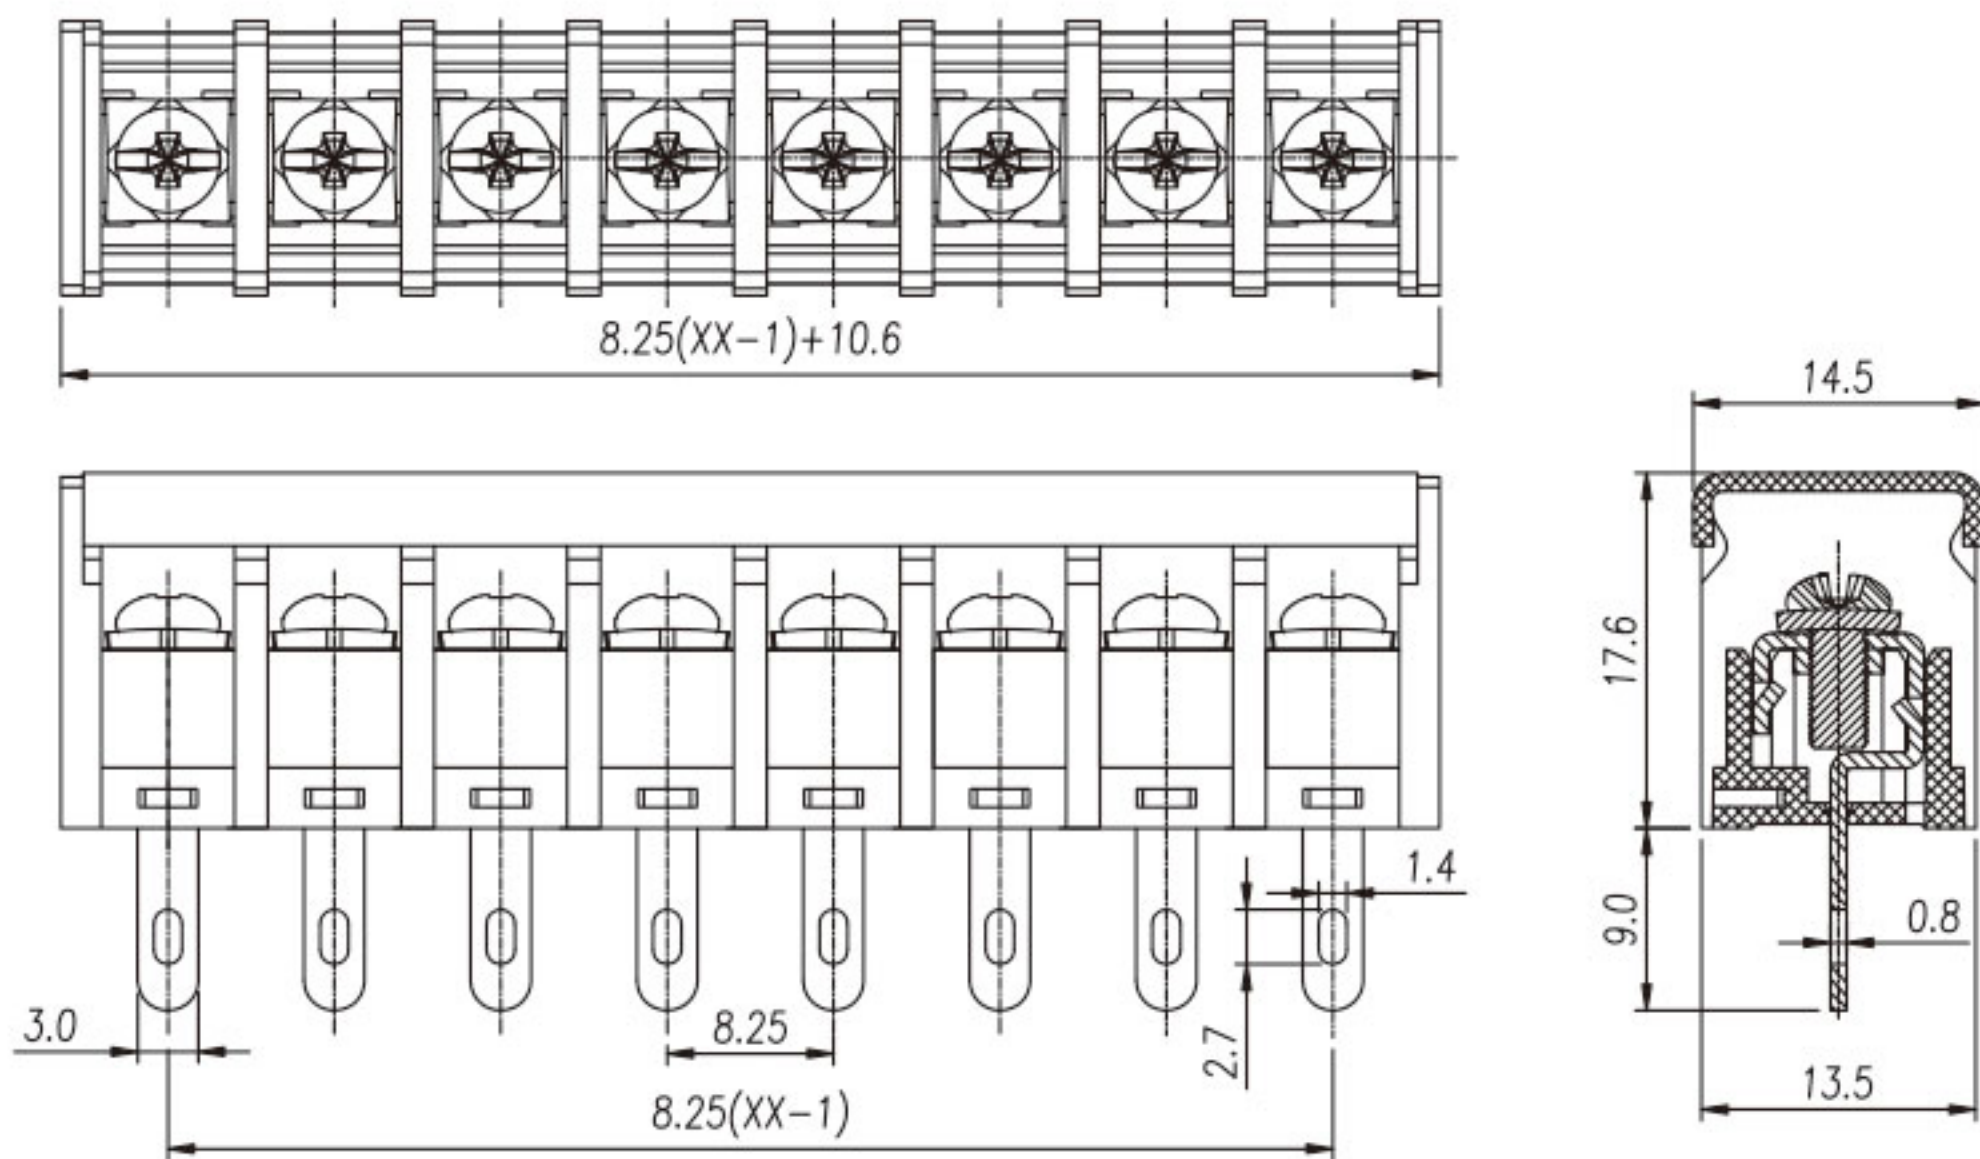

材质及电镀		电气性能	
螺丝	M3.0, 钢, 镀镍	参考标准	UL IEC
焊脚	黄铜, 镀锡	额定电压	300V 450V
塑件	PA66, UL94V-0	额定电流	15A 24A
		使用线径	22-14AWG 2.5mm <sup>2</sup>
		接触电阻	20mΩ
		绝缘电阻	500MΩ/DC500V
		耐电压	AC2000V/1Min
		温度范围	-40°C~+105°C
		扭矩	5.10kgf-cm/0.5Nm/4.43Lbin