




**MODEL:JL48H**

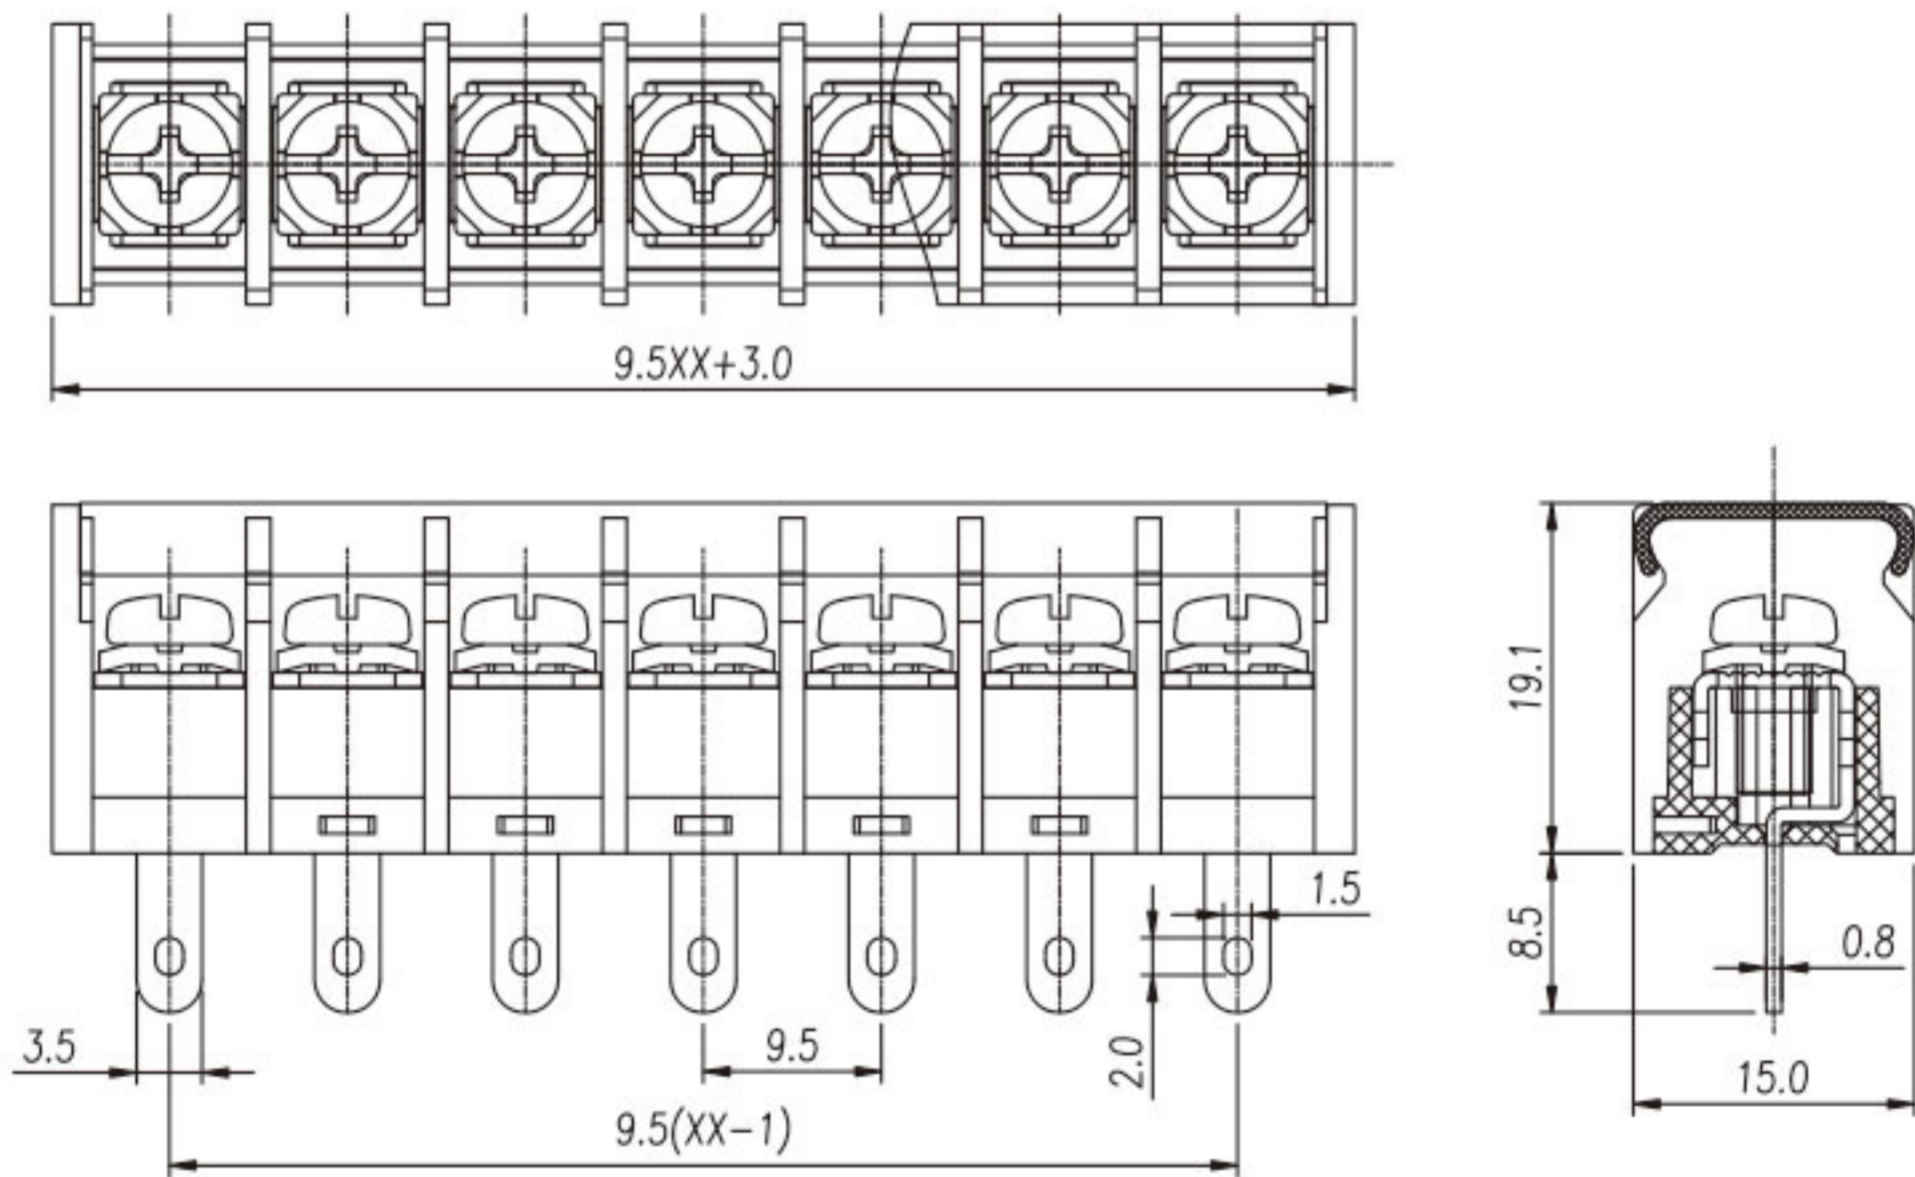

材质及电镀		电气性能	
螺丝	M4.0, 钢, 镀镍	参考标准	UL IEC
焊脚	黄铜, 镀锡	额定电压	300V 750V
塑件	PA66, UL94V-0	额定电流	20A 32A
		使用线径	22-12AWG 4.0mm <sup>2</sup>
		接触电阻	20mΩ
		绝缘电阻	500MΩ/DC500V
		耐电压	AC2000V/1Min
		温度范围	-40°C~+105°C
		扭矩	12.24kgf-cm/1.2Nm/10.6Lbin